



## High Yield Seamless Pipe


As a specialist in seamless pipe products, **Tubular Steel, Inc.** stocks a full range of seamless products designed for high strength applications coupled with chemistries for cold weather assurance.

### More Pipe OD's & Walls to Shorten Your Sourcing Time

- Customers can select from our industry leading X52 inventory.

### Charpy Impact Values (CVN)

- Inventories include materials with Charpy impact values (CVN) which meet and often exceed the requirements of PSL-2

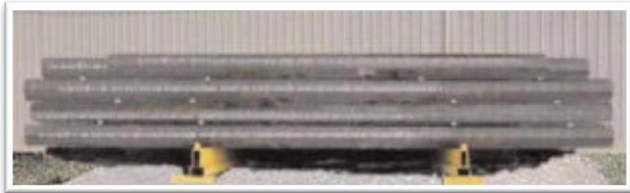

### MTRs Include Carbon Equivalency (CE) Values

- All MTR's include CE values designed to meet the stringent requirements of the pipeline and offshore industries. Our products will not require extensive "exception approval" efforts with consulting engineers.

### Pay Only for the Stock You Need


- Savvy buyers count on TSI to perform on saw cutting: one piece or a full truckload. Precision saw cutting with full traceability. We meet the challenge of providing saw cutting on a net weight basis.

### Contract Services Available

- TSI can heat treat, bend or epoxy coat to your specifications.

### Flatbed Service to Your Area

- Industry leading logistics support with delivery via TSI Zone trucking.

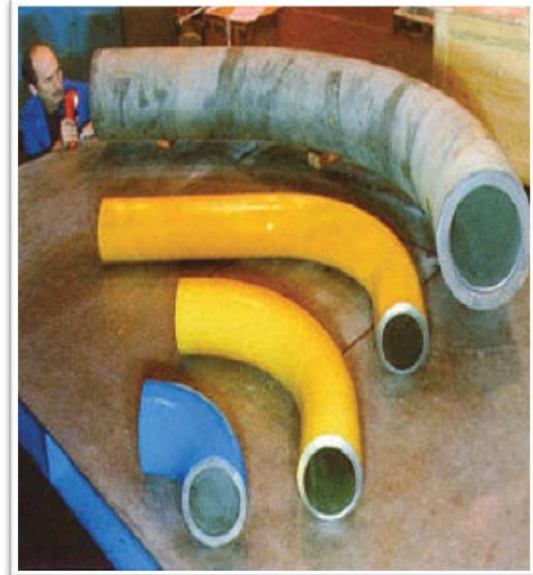

### Specifications

- API-5L X52, API-5L X65
- PSL-1 / PSL-2 certified
- Sizes through 24" OD
- Heavywalls to schedule 160 & XXhvy
- Consult accompanying chart for specific size availability

### Sales Locations

**St. Louis**  
(314) 851-9200

**Cleveland**  
(440) 960-6100

**Houston**  
(281) 371-5200

**Los Angeles**  
(909) 429-6900

**Savannah**  
(800) 388-7563

With six strategically located operations nationwide **Tubular Steel, Inc.** stocks over 6,000 separate combinations of carbon and alloy pipe/tube products providing our customers and our markets one of the widest breadths of product offerings in the industry.

We welcome the opportunity to quote your steel service requirements.

# Seamless Pipe, API-5LX52

Highlighted Sizes Regularly Stocked

Pipe Size	O.D. in Inches	5	10	20	30	40	STD.	60	80	XH	100	120	140	160	XXH
1/8	.405	.035	.049			.068	.068		.095	.095					
1/4	.540	.049	.065			.088	.088		.119	.119					
3/8	.675	.049	.065			.091	.091		.126	.126					
1/2	.840	.065	.083			.109	.109		.147	.147				.187	.294
3/4	1.050	.065	.083			.113	.113		.154	.154				1.304	1.714
1	1.315	.065	.109			.133	.133		.179	.179				1.937	2.441
1-1/4	1.660	.065	.109			.140	.140		.191	.191				2.844	3.559
1-1/2	1.900	.065	.109			.145	.145		.200	.200				3.765	5.214
2	2.375	.065	.109			.154	.154		.218	.218				4.859	6.408
2-1/2	2.875	.065	.109			.154	.154		.218	.218				7.444	9.029
3	3.500	.083	.120			.216	.216		.300	.300				10.010	13.700
3-1/2	4.0	.083	.120			.226	.226		.318	.318				14.320	18.580
4	4.5	.083	.120			.237	.237	.281	.337	.337		.437		22.510	27.540
4-1/2	5.0					.247	.247	.281	.337	.337		.437			7.10
5	5.563	.109	.134			.258	.258	.300	.375	.375		.500		32.960	38.550
6	6.625	.109	.134			.280	.280	.322	.432	.432		.562		45.300	53.160
7	7.625					.301	.301	.342	.500	.500		.630			63.080
8	8.625	.109	.148	.250	.277	.322	.322	.365	.500	.500	.593	.718	.812	9.906	12.875
9	9.625					.342	.342	.385	.500	.500	.593	.718	.812	10.000	1.125
10	10.75	.134	.165	.250	.307	.365	.365	.406	.593	.593	.718	.843	1.000	1.125	1.312
11	11.75					.375	.375	.417	.593	.593	.718	.843	1.000	1.125	1.312
12	12.75	.165	.180	.250	.330	.406	.375	.417	.593	.593	.718	.843	1.000	1.125	1.312
14	14.0	.250	.312	.375	.437	.500	.437	.479	.593	.593	.718	.843	1.000	1.125	1.312
16	16.0	.250	.312	.375	.437	.500	.437	.479	.593	.593	.718	.843	1.000	1.125	1.312
18	18.0	.250	.312	.375	.437	.500	.437	.479	.593	.593	.718	.843	1.000	1.125	1.312
20	20.0	.250	.312	.375	.437	.500	.437	.479	.593	.593	.718	.843	1.000	1.125	1.312
22	22.0	.250	.312	.375	.437	.500	.437	.479	.593	.593	.718	.843	1.000	1.125	1.312
24	24.0	.250	.312	.375	.437	.500	.437	.479	.593	.593	.718	.843	1.000	1.125	1.312
26	26.0	.312	.500	.625	.750	.875	.750	.875	1.125	1.125	1.375	1.625	1.875	2.125	2.375
28	28.0	.312	.500	.625	.750	.875	.750	.875	1.125	1.125	1.375	1.625	1.875	2.125	2.375
30	30.0	.312	.500	.625	.750	.875	.750	.875	1.125	1.125	1.375	1.625	1.875	2.125	2.375
32	32.0	.312	.500	.625	.750	.875	.750	.875	1.125	1.125	1.375	1.625	1.875	2.125	2.375
34	34.0	.344	.500	.625	.750	.875	.750	.875	1.125	1.125	1.375	1.625	1.875	2.125	2.375
36	36.0	.312	.500	.625	.750	.875	.750	.875	1.125	1.125	1.375	1.625	1.875	2.125	2.375
42	42.0					.375	.375	.417	.593	.593	.718	.843	1.000	1.125	1.312
48	48.0					.375	.375	.417	.593	.593	.718	.843	1.000	1.125	1.312

Orange figures indicate wall thickness in inches

Black figures indicate weight per foot in pounds

## Sales Locations

St. Louis  
(314) 851-9200

Cleveland  
(440) 960-6100

Houston  
(281) 579-5200

Los Angeles  
(909) 429-6900

Savannah  
(800) 388-7563

www.tubularsteel.com